



## FRAME AND COVER ADJUSTMENT

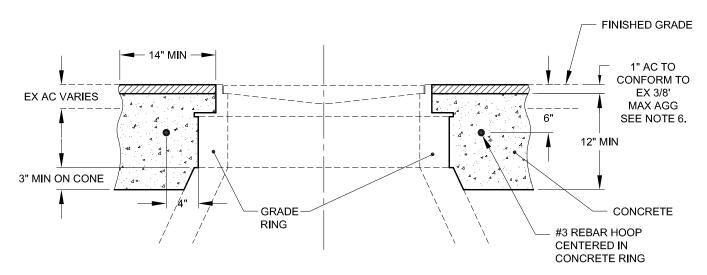

## MANHOLE & RISER

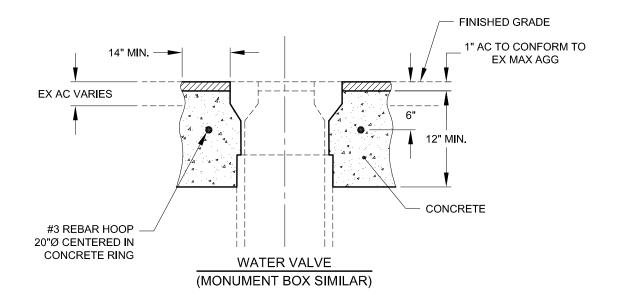

## NOTES:

- 1. THIS DETAIL SHALL BE USED WHERE FRAME AND COVERS ARE BEING ADJUSTED TO GRADE.
- 2. CLASS B CONCRETE SHALL BE USED. FINISH SHALL BE ROUGH.
- 3. CONCRETE SHALL BE PLACED AGAINST NEATLY EDGED EXCAVATION.
- 4. FRAMES SHALL MATCH EX FINISHED GRADE WITHIN 1/8".
- 5. TACK THE AREA TO BE PAVED, PRIOR TO PLACEMENT OF AC.
- 6. A.C. MAY BE 1/2' MAX, AGG, ONLY WITH PRIOR APPROVAL OF CITY ENGINEER.

Dr.	KT	No.	Date	Revision	Appr.	Approved By:	STD PLAN
	IXI						
Ch.	ws						1 1 2 2
Date						Charlie Swimley Date City Engineer / Deputy Public Works Director	1 123
Date	12/00					RCE No. 52842	